


TECHNICAL SPECIFICATIONS:

- Flysheet:** RIP-STOP PU polyester
"UV Resistant" (3000 mm H₂O)
- Sleeping area:** polyamide
- Floor:** PE fabric (10,000 mm H₂O)
- Frame:** fiberglass FG fi 8,5 mm
option: aluminium 7001 T6 fi 9,5 mm
- Pins:** aluminium 7001 T6
- Seams:** all taped
- Tent capacity:** 3 persons
- Weight:** 4.5 kg / alu option : 4.0 kg

[dimensions: 275 x 235 x 145 cm]

GUARANTEE: 2 YEARS

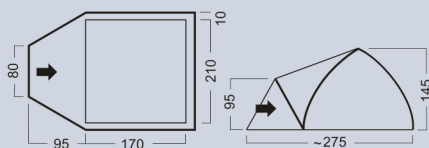

gwinea



Made in Poland

SETTING UP THE TENT

- Spread out the tent on the ground, not necessarily in the place where you want to set it. Do not fix it with pins to the ground! Fasten the zippers.
- Insert assembled frame poles into the sleeves of the flysheet (Fig. 1). Insert the shorter frame pole into the sleeve of the dome.
- Slide the tube that ends the upper frame pole onto the pin, which is located on the ring in the corner of the floor (Detail A). Bend the upper pole to mount its other end in the opposite corner. Similarly mount the other frame poles.
- Use the free end of the tensioning tape near the snap buckles to adjust the tension of the flysheet (Fig. 2 - arrow).
- After assembling the tent, set it in the desired location. Stretch the floor and attach it with the pins in the corners, then stabilize the tent using guy lines. Put the roof cover on and stabilize the tent with guy lines.

COMPONENTS:

flysheet and sleeping area cover (integrated)
frame (3 frame poles)
aluminium pins (12)
guy lines (3)
bag,
manual,
guarantee



* opcja



MARABUT
Spółka z o.o.

32-070 Czernichów 451
tel.: (012) 270-24-24
fax: (012) 270-24-40
e-mail: biuro@marabut.pl
www.namioty.pl